



113SHPTP	
Ballast Type	Magnetic
Starting Method	Preheat Start
Lamp Connection	
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFT13W/GX23, CFQ13W/GX23	1	15	0.13	0.94	1.68	0.88	5.87	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Ballast Case Temperature: 194°F, 90°C


APPROVALS:

- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

PHYSICAL DIMENSIONS:

<p>Length (L): 3.10" Width (W): 1.89" Height (H): 1.43" Mounting (M): 2.75" Lead Length:</p>	
---	--

WIRING DIAGRAM:

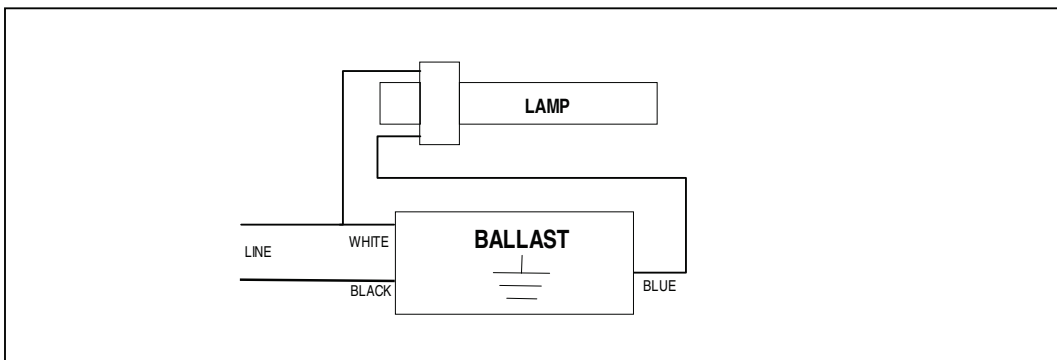

1.877.652.9640
248.652.9640

Commercial and Residential
Monday-Friday 8am - 5pm EST

Green Electrical Supply
www.GreenElectricalSupply.com
2355 Arizona Court, Rochester Hills, MI 48309