



CC1322TP	
Ballast Type	Magnetic
Starting Method	Preheat Start
Lamp Connection	
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F14T8	1	12.5	0.23	0.45	1.56	0.76	6.08	15
F15T8	1	13.5	0.23	0.50	1.55	0.77	5.70	15
F18T8	1	13.4	0.20	0.56	1.56	0.64	4.78	15
F14T12	1	12.5	0.23	0.45	1.56	0.76	1.84	15
F15T12	1	12.9	0.24	0.45	1.56	0.73	5.66	15
F20T12	1	13.5	0.20	0.58	1.56	0.58	4.30	15
CFT13W/GX23	1	13.0	0.22	0.48	1.65	0.85	6.54	15
FC6T9 20W	1	13.6	0.23	0.49	1.66	0.58	4.26	15

**PERFORMANCE:**

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Ballast Case Temperature: 194°F, 90°C


**APPROVALS:**

- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

**PHYSICAL DIMENSIONS:**

Length (L):	3.15"	
Width (W):	1.14"	
Height (H):	1.77"	
Mounting (M):	2.50"	
Lead Length:		
Black	9"x18"	

**WIRING DIAGRAM:**

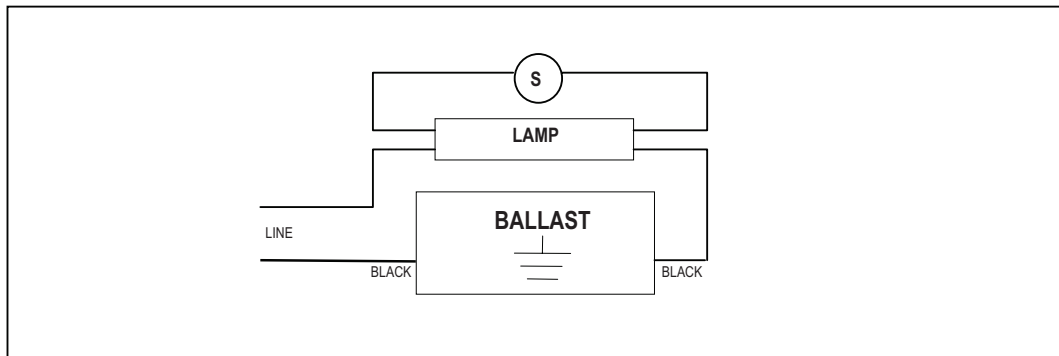

1.877.652.9640  
248.652.9640

Commercial and Residential  
Monday-Friday 8am - 5pm EST

**Green Electrical Supply**  
www.GreenElectricalSupply.com  
2355 Arizona Court, Rochester Hills, MI 48309