



CC579TP	
Ballast Type	Magnetic
Starting Method	Preheat Start
Lamp Connection	
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F8T5	1	9.0	0.14	0.55	1.61	0.82	9.11	15
CFT7W/G23	1	9.0	0.15	0.52	1.57	0.87	9.67	15
CFT9W/G23	1	9.0	0.15	0.54	1.58	0.75	8.33	15

**PERFORMANCE:**

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Ballast Case Temperature: 194°F, 90°C


**APPROVALS:**

- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

**PHYSICAL DIMENSIONS:**

Length (L):	2.75"
Width (W):	1.50"
Height (H):	1.20"
Mounting (M):	2.25"
Lead Length:	
Black	12" X 12"

**WIRING DIAGRAM:**

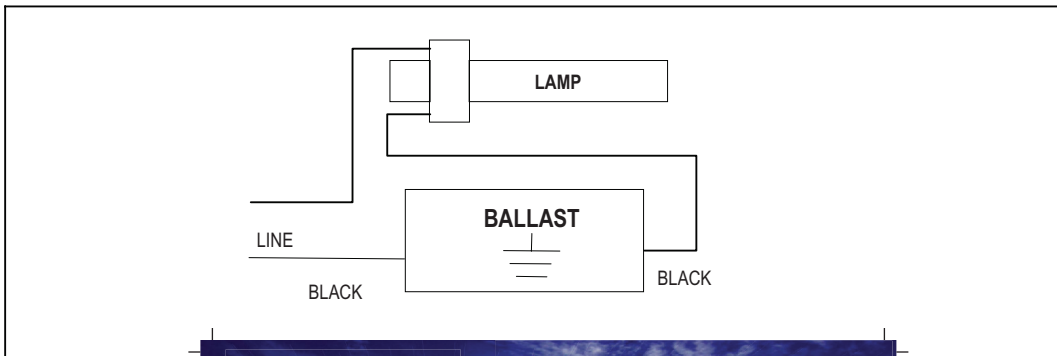

1.877.652.9640  
248.652.9640

Commercial and Residential  
Monday-Friday 8am - 5pm EST

**Green Electrical Supply**  
www.GreenElectricalSupply.com  
2355 Arizona Court, Rochester Hills, MI 48309