



PRODUCT FEATURES


STARTING METHOD: Rapid	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: --	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 140°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8	1	120	32.0	0.27	0.99	1.34	1.00	3.13	10	F1-7
		277	32.0	0.12	0.99	1.34	1.00	3.13	10	F1-7
F25T8	1	120	25.0	0.22	0.99	1.45	1.00	4.00	10	F1-7
		277	26.0	0.10	0.98	1.46	1.00	3.85	10	F1-7
F17T8	1	120	20.0	0.17	0.99	1.56	1.00	5.00	12	F1-7
		277	21.0	0.08	0.98	1.56	1.00	4.76	12	F1-7

WIRING DIAGRAMS

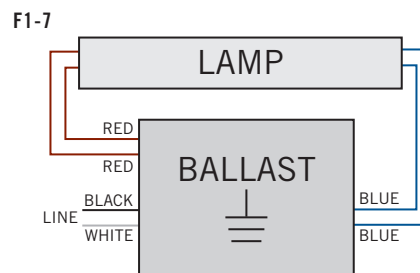




KTEB-132-UV-TP-SL

T8 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

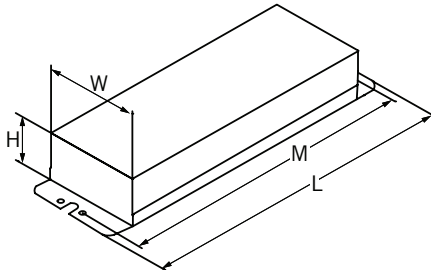

CASE DIMENSIONS


LENGTH: 9.45"
WIDTH: 1.15"
HEIGHT: 1.26"
MOUNTING: 8.90"
UNIT WEIGHT: 2.45 lbs

STANDARD LEAD LENGTHS*

BLACK: 22.00"
WHITE: 22.00"
BLUE: 28.00" X 28.00"
RED: 22.00" X 22.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

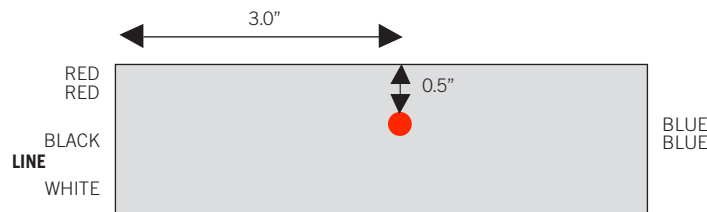

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-UV-TP-SL		1	Active

CATALOG NUMBER BREAKDOWN

KTEB-132-UV-TP-SL

