



KTEB-232EBF-UV-TP-PIC	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120-277Vac ± 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	2	120	50	0.42	0.99	1.6	0.77	1.54	10
		277	50	0.18	0.99	1.6	0.77	1.54	10
	1	120	32	0.26	0.98	1.6	0.85	2.66	10
		277	32	0.12	0.98	1.6	0.85	2.66	10
F25T8	2	120	40	0.33	0.99	1.6	0.80	2.00	10
		277	40	0.15	0.99	1.6	0.80	2.00	10
	1	120	25	0.21	0.98	1.6	0.88	3.52	12
		277	25	0.09	0.98	1.6	0.88	3.52	12
F17T8	2	120	29	0.24	0.98	1.6	0.80	2.76	10
		277	29	0.11	0.98	1.6	0.80	2.76	10
	1	120	19	0.16	0.98	1.6	0.88	4.63	15
		277	19	0.07	0.98	1.6	0.88	4.63	15

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Non Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 5-Year Warranty


APPROVALS:

- UL, cUL 935 Pending

PHYSICAL DIMENSIONS:

Length (L):	9.50"	
Width (W):	1.38"	
Height (H):	1.18"	
Mounting (M):	8.90"	
Lead Length:		
White, Black	25"	
Blue	31"	
Red	48"	

WIRING DIAGRAM:

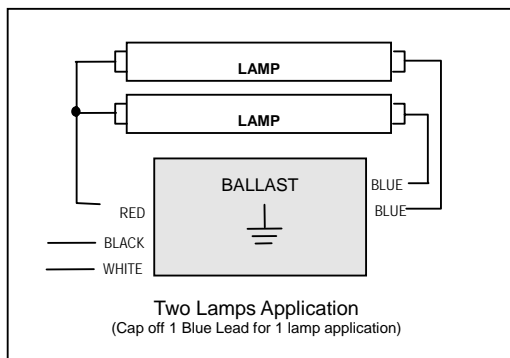

HOT SPOT LOCATION:

