



PRODUCT FEATURES



STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F40T12	2	120	57.0	0.85	0.54	1.54	0.75	1.32	150	F2-9
F34T12	2	120	48.0	0.74	0.54	1.52	0.73	1.52	150	F2-9
F40T12 (25W Shoplight)	2	120	56.0	0.83	0.55	1.56	1.05	1.88	150	F2-9
F30T12	2	120	47.0	0.72	0.55	1.56	0.85	1.81	150	F2-9
F32T8	2	120	66.0	0.96	0.57	1.59	1.05	1.59	150	F2-9
F25T8	2	120	51.0	0.77	0.55	1.54	1.05	2.06	150	F2-9
CFQ26W/G24q	2	120	43.0	0.69	0.52	1.56	0.85	1.98	150	P2-1
CFTR32W/GX24q	2	120	61.0	0.91	0.56	1.57	0.89	1.46	150	F2-9

WIRING DIAGRAMS

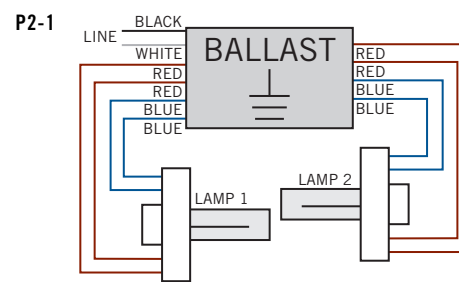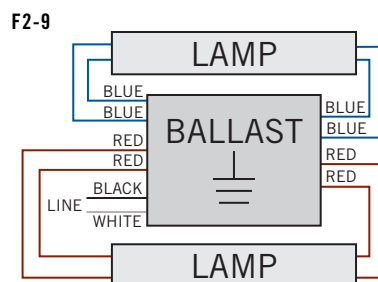


CONNECT WIRES FROM LEFT SIDE OF BALLAST TO LAMP 1
CONNECT WIRES FROM RIGHT SIDE OF BALLAST TO LAMP 2



KTEB-240-1-TP /C

T12 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

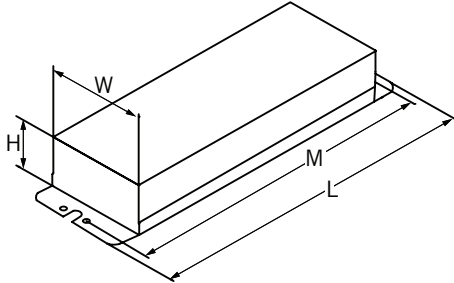

CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.89"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 1.11 lbs

STANDARD LEAD LENGTHS*

BLACK: 21.00"
WHITE: 21.00"
BLUE: 26.00" X 26.00", 36.00" X 36.00"
RED: 26.00" X 26.00", 36.00" X 36.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

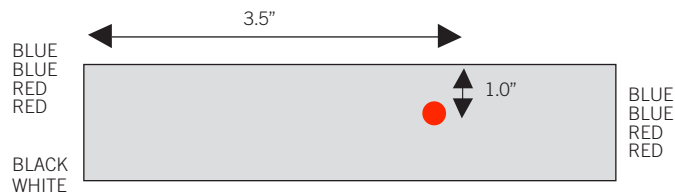

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-240-1-TP/C-CP	Carton	40	Quick Ship
KTEB-240-1-TP/C-BP	Bulk	1,200	Special Order

CATALOG NUMBER BREAKDOWN

KTEB-240-1-TP/C

