



KTEB-275-1-TP-PIC-SL	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120Vac ± 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F96T12 75W	2	133	1.12	0.99	<1.7	0.88	0.66	10
	1	82	0.68	0.99	<1.7	1.05	1.28	10
F96T12/ES 60W	2	117	0.98	0.99	<1.7	0.88	0.75	10
	1	72	0.60	0.99	<1.7	1.05	1.46	10
F72T12 57W	2	107	0.92	0.99	<1.7	0.90	0.84	10
	1	67	0.60	0.99	<1.7	1.05	1.57	10
F48T12 40W	2	76	0.68	0.99	<1.7	0.92	1.21	10
F48T12/ES 30W	2	64	0.60	0.99	<1.7	0.92	1.44	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 3-Year Warranty


APPROVALS:

- UL, cUL 935 Listed

PHYSICAL DIMENSIONS:

Length (L):	9.50"
Width (W):	1.80"
Height (H):	1.38"
Mounting (M):	9.00"

WIRING DIAGRAM:

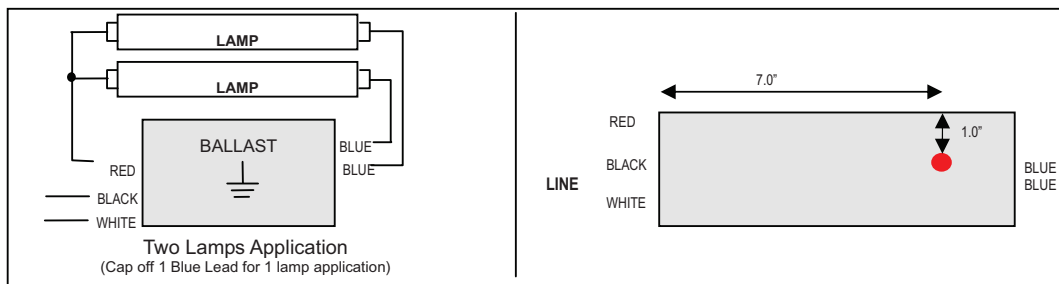

1.877.652.9640
248.652.9640

Commercial and Residential
Monday-Friday 8am - 5pm EST

Green Electrical Supply
www.GreenElectricalSupply.com
2355 Arizona Court, Rochester Hills, MI 48309