



## PRODUCT FEATURES



<b>STARTING METHOD:</b> Program	<b>INPUT VOLTAGE:</b> 120-277VAC ±10%	<b>WARRANTY:</b> 5 Years
<b>LAMP CONNECTION:</b> Parallel	<b>INPUT FREQUENCY:</b> 50/60 Hz	<b>POWER FACTOR:</b> High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz

## ELECTRICAL SPECIFICATIONS


LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8 32W	3	120	79.0	0.65	0.99	<1.70	0.77	0.97	10	F3-9
		277	79.0	0.29	0.98	<1.70	0.77	0.97	10	F3-9
	2	120	58.0	0.49	0.99	<1.70	0.86	1.48	10	F2-16
		277	58.0	0.21	0.98	<1.70	0.86	1.48	10	F2-16
F32T8 30W	3	120	73.0	0.60	0.99	<1.70	0.75	1.03	10	F3-9
		277	73.0	0.27	0.98	<1.70	0.75	1.03	10	F3-9
	2	120	56.0	0.47	0.99	<1.70	0.84	1.50	10	F2-16
		277	56.0	0.21	0.97	<1.70	0.84	1.50	12	F2-16
F32T8 28W	3	120	69.0	0.57	0.99	<1.70	0.75	1.09	10	F3-9
		277	69.0	0.25	0.98	<1.70	0.75	1.09	10	F3-9
	2	120	54.0	0.45	0.99	<1.70	0.86	1.59	10	F2-16
		277	55.0	0.20	0.97	<1.70	0.86	1.56	12	F2-16
F32T8 25W	3	120	64.0	0.53	0.99	<1.70	0.79	1.23	10	F3-9
		277	65.0	0.24	0.98	<1.70	0.79	1.22	10	F3-9
	2	120	51.0	0.42	0.99	<1.70	0.92	1.80	10	F2-16
		277	52.0	0.19	0.97	<1.70	0.92	1.77	12	F2-16
F25T8 25W	3	120	62.0	0.51	0.99	<1.70	0.74	1.19	10	F3-9
		277	62.0	0.23	0.98	<1.70	0.74	1.19	10	F3-9
	2	120	49.0	0.40	0.99	<1.70	0.88	1.80	10	F2-16
		277	50.0	0.18	0.97	<1.70	0.88	1.76	12	F2-16
F17T8 17W	3	120	45.0	0.37	0.99	<1.70	0.77	1.71	10	F3-9
		277	45.0	0.17	0.96	<1.70	0.77	1.71	12	F3-9
	2	120	35.0	0.30	0.99	<1.70	0.84	2.40	10	F2-16
		277	36.0	0.14	0.95	<1.70	0.84	2.33	15	F2-16
F40T8 40W	2	120	74.0	0.61	0.99	<1.70	0.82	1.12	10	F2-16
		277	74.0	0.27	0.98	<1.70	0.82	1.12	10	F2-16

## WIRING DIAGRAMS

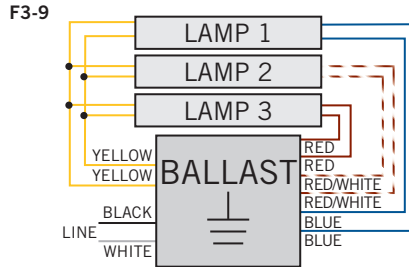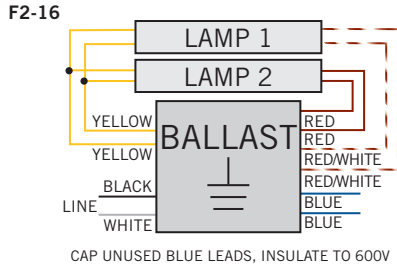

Program Start T8 ballasts require the use of NON-shunted lampholders/sockets.

## CASE STYLE/DIMENSIONS

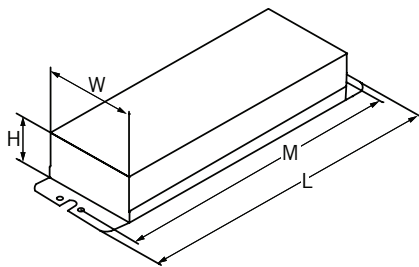

### CASE DIMENSIONS


LENGTH: 9.50"
WIDTH: 1.70"
HEIGHT: 1.15"
MOUNTING: 8.90"
UNIT WEIGHT: 1.60 lbs

### STANDARD LEAD LENGTHS\*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 32.00" x 32.00"
RED: 32.00" x 32.00"
YELLOW: 48.00" X 48.00"
RED/WHITE: 32.00" X 32.00"

\*Consult Keystone for special lead length requirements.

## HOT SPOT LOCATION

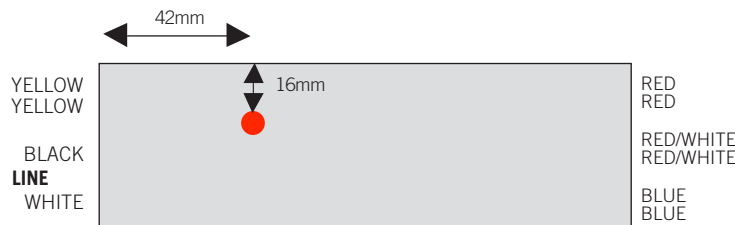

## ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-332-UV-PS-L-P-CP	Carton	30	Active

## CATALOG NUMBER BREAKDOWN

# KTEB-332-UV-PS-L-P

