



KTEB-432EBF-UV-TP-PIC	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	4	120	96	0.81	0.99	1.6	0.77	0.80	10
		277	96	0.35	0.98	1.6	0.77	0.80	10
	3	120	79	0.67	0.99	1.6	0.82	1.04	10
		277	79	0.29	0.97	1.6	0.82	1.04	10
F25T8	4	120	72	0.60	0.99	1.6	0.80	1.11	10
		277	72	0.27	0.98	1.6	0.80	1.11	10
	3	120	60	0.51	0.99	1.6	0.85	1.42	12
		277	60	0.23	0.97	1.6	0.85	1.42	12
F17T8	4	120	52	0.43	0.99	1.6	0.81	1.56	10
		277	52	0.20	0.96	1.6	0.81	1.56	10
	3	120	43	0.36	0.99	1.6	0.87	2.02	12
		277	43	0.17	0.95	1.6	0.87	2.02	12

PERFORMANCE:

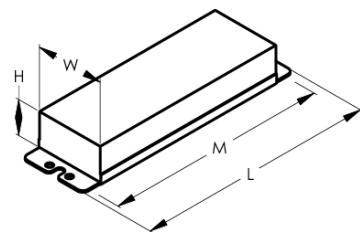
- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 5-Year Warranty

APPROVALS:

- UL, cUL 935 Pending

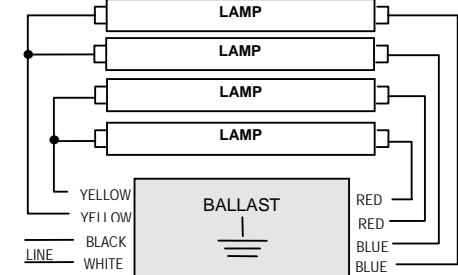
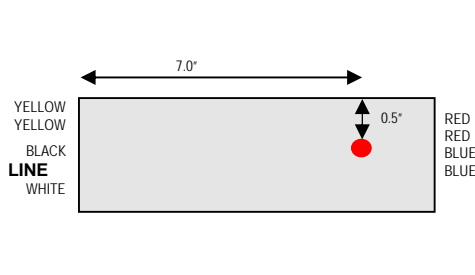
PHYSICAL DIMENSIONS:

Length (L):	9.50"
Width (W):	1.38"
Height (H):	1.18"
Mounting (M):	8.90"
Lead Length:	
White, Black	25"
Blue	31"
Red	31"
Yellow	48"



WIRING DIAGRAM:

Hot Spot Location:

Four Lamps Application
(Cap off 1 Blue Lead for 3 lamp application)