



## Specification Sheet



**Catalog Number: MH-175A-D-FCAN**

**175W METAL HALIDE**

### General Information

Lamp Type	175W MH
ANSI Designation	M57 / H39
Line Voltage (V)	120/277
Regulation	5%
Frequency (Hz)	60
Recommended Fuse (A)	5/3
Circuit Type	CWA
Insulation Class	105°C
Winding Materials (Pri/Sec)	Cu/Cu
Lamp Starter	-
Agency Certification	RU, cRU
Maximum Distance to Lamp	10 FT

### Wiring Diagram

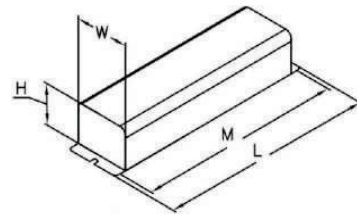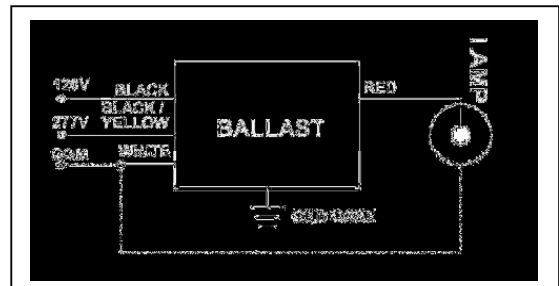

### Electrical Characteristics

Line Volt (V)	Power Factor	Line Current (A)			Input Power (W)	Open Circuit Voltage (V)	Min Start Temp.	UL Temp. Code
		Operating	Open	Start				
120	High	1.85	1.19	1.66	202	280	-30°C	A
277	High	0.82	0.53	0.63	205	280	-30°C	A

### Physical Characteristics

Overall Dimensions (Inches)				Ballast Net Weight (KG)	Lead Length (Inches)
Length	Width	Height	Mounting		
11.8	3.23	2.75	11.4	5.89	12-14

1.877.652.9640  
248.652.9640

Commercial and Residential  
Monday-Friday 8am - 5pm EST

**Green Electrical Supply**  
www.GreenElectricalSupply.com  
2355 Arizona Court, Rochester Hills, MI 48309