

# MLLWP70LED50DS



## LED WALLMAX - LARGE 70W WALL PACK: FULL CUTOFF

DLC Qualified Wall Pack meets full cut off criteria established by the IESNA.

**LED Module:** An efficient, energy saving replacement for metal halide and high-pressure sodium fixtures. Contains an integral listed Driver.

Fixture can mount to electrical box or direct to surface.

### FEATURES:

- Replaces up to 250 Watt Metal Halide
- DLC qualified
- Lumens delivered 4400
- 69 Watts total consumed
- CCT 5000K
- 50,000 hour life at L70 standards
- Self-contained driver
- Universal 120V through 277V
- Maintenance free; no UV
- Dusk To Dawn / Occupancy sensor compatible
- Can mount on electrical box or direct to surface
- LM-79/80 data available
- 5 Year Limited Warranty
- 20W, 30W, and 40W models available
- Does not attract insects

|                |
|----------------|
| PROJECT NAME   |
| CATALOG NUMBER |
| NOTES          |
| FIXTURE TYPE   |



### CONSTRUCTION:

**Fixture:** Heavy-duty cast aluminum one-piece housing; polyester coated; rust and corrosion proof. Fixture is sealed to be dirt and bug proof.

**Lens:** High quality anti-shock Boran glass.

**LED Module:** Copper plating to provide high thermal transfer rate minimizing junction temperature of LED.

**Finish:** Dark Bronze or Textured White



#### Luminaire Ordering Information:

| WATTS | ORDER CODE | MODEL NUMBER    | LUMENS | L70 LIFE (Hrs) | DIMENSIONS (L"xW"xH") | K    |
|-------|------------|-----------------|--------|----------------|-----------------------|------|
| 70    | 70908      | MLLWP70LED50DS  | 4400   | 50,000         | 16.9 x 13.6 x 9.0     | 5000 |
| 70    | 71132      | MLLWP70LED50DSW | 4400   | 50,000         | 16.9 x 13.6 x 9.0     | 5000 |

MAX11338-10-10

Lighting layouts and spacing criteria available upon request

Green Electrical Supply


GreenElectricalSupply.com

Our Customer Service Department is here to assist you at 877-652-9640




## SPECIFICATIONS:

| Item                | Specification           | Details  |
|---------------------|-------------------------|--|
| General Performance | Spacing Criteria        | Available upon request                         |
|                     | Color Temperature       | 5000K  |
|                     | Lumens                  | 4400   |
|                     | Efficacy                | 64 lumen/watt                                  |
|                     | Color Consistency       | Proprietary binning for uniform color          |
|                     | Lumen Maintenance (L70) | 50,000 hours                                   |
| Electrical          | Power Factor            | Over 98%                                       |
|                     | Input Voltage           | 120V-277V 50/60 Hz                             |
|                     | Power Consumption       | 69 Watts                                       |
| Physical            | Dimensions              | 16.9" x 13.6" x 9.0"                           |
|                     | Weight                  | 10.5 lbs                                       |
|                     | Housing                 | Aluminum                                       |
|                     | Lens                    | Anti-Shock Boron Glass                         |
|                     | Mounting                | Fits electrical box or mount direction surface |
|                     | Operating Temperature   | -30°F to 130°F                                 |
|                     | Humidity                | 20% - 85% RH, non condensing                   |
| Certification       | Certification           | ETL, FCC, DLC, LM79, LM80                      |
|                     | Material Usage          | RoHS compliant; no mercury                     |
|                     | Environment             | Indoor / Outdoor                               |
|                     | LED Class               | N/A  |

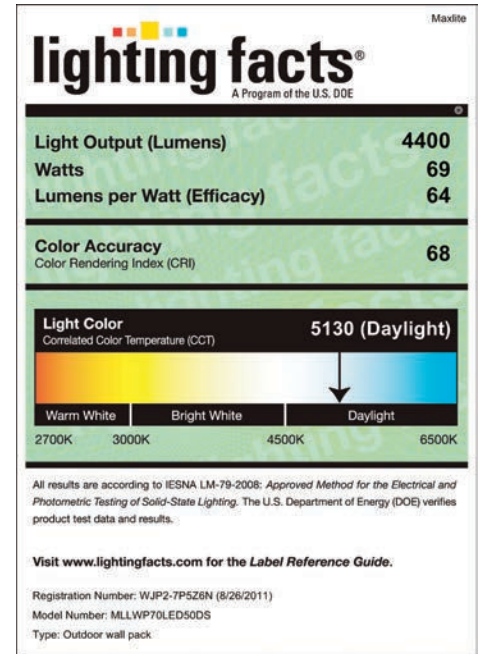


Lighting layouts and spacing criteria available upon request

## DIMENSIONS:

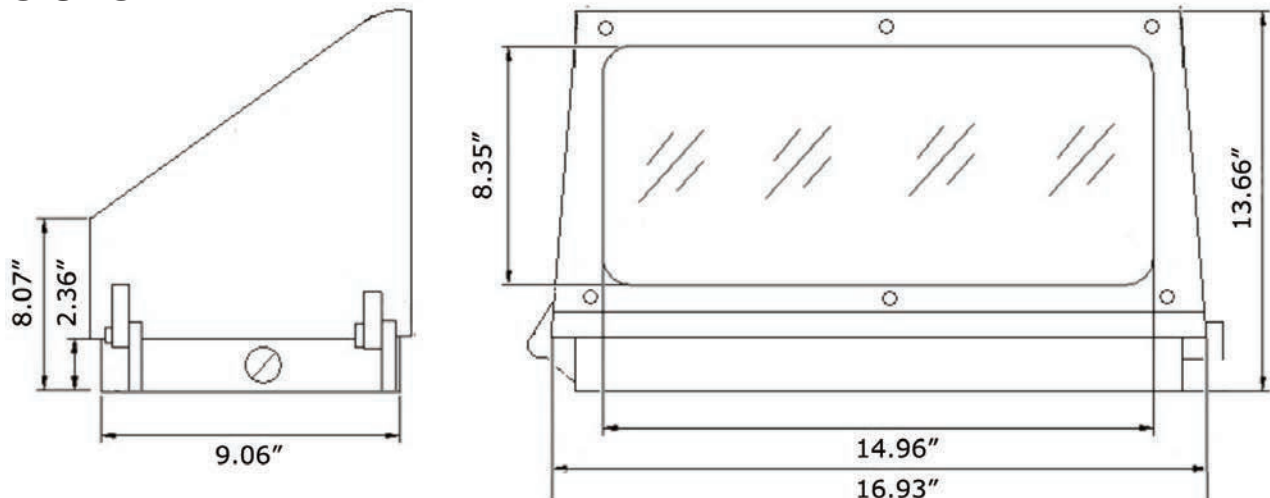

**PHOTOMETRICS:**

MAXIMUM PLANE AND MAXIMUM CONE PLOTS OF CANDELA

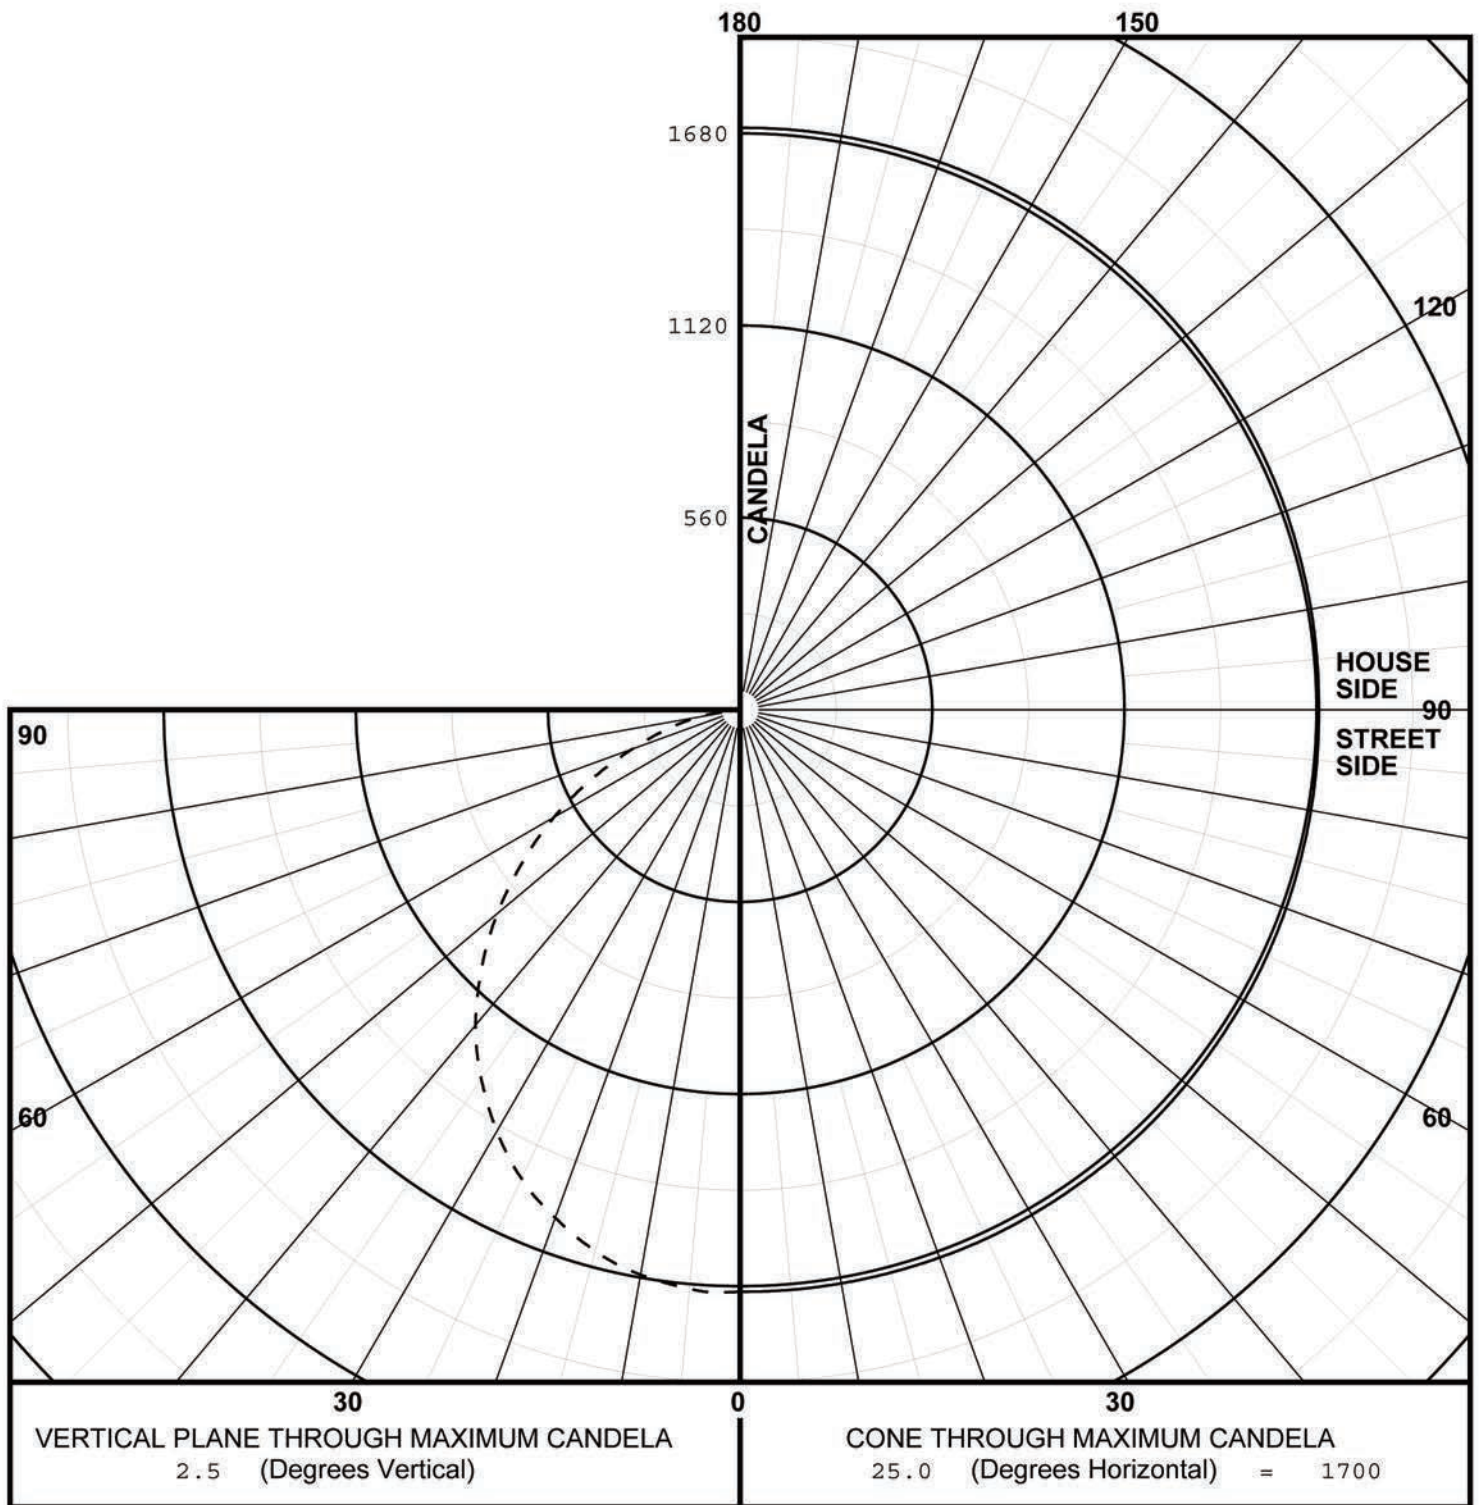

Lighting layouts and spacing criteria available upon request