

Electronics Ballast

Standard : BALLAST SPECIFICATION

Model : SKEU322HE

Input voltage : 120 - 277Volts, 50/60Hz
Power factor : > 0.99
THD : < 10%
3rd Harmonic content : < 6%
Line transient protection : Withstand transients defined in ANSI C62.41-1993
EMI : FCC Parts 18, Subparts C, Class A
Lamps : Two or one F32T8
Two or one F25T8
Two or one F17T8

Lamps		Volts	Input Watts	B. F	Power Factor	Ballast Efficacy Factor	THD(%)
Type	#						
F32T8	2	120	55	0.87	>0.98	1.58	<10%
		277	54	0.87	>0.98	1.61	<10%
F32T8	1	120	TBD				
		277	TBD				
F25T8	2	120	44.00	0.89	>0.98	2.00	<10%
		277	44.00	0.89	>0.98	2.00	<10%
F25T8	1	120	TBD				
		277	TBD				
F17T8	2	120	30.00	0.90	>0.98	3.00	<10%
		277	30.00	0.90	>0.98	3.00	<10%
F17T8	1	120	TBD				
		277	TBD				

Flicker : < 2%
Lamp configuration : Independent parallel
Type of start : Instant start
Minimum starting temperature : 0°F (-18°C)
Lamp current frequency : 45kHz
Sound rated : Class A
Remote Mounting : 6,400mm. Min. lead length, 18AWG Lead Wires
Weight : About 0.5kg

Electronics Ballast

Date : Feb. 18, 2006


Rev. : 1

Page : 2/2

Standard : BALLAST SPECIFICATION

Model : SKEU322HE

[DIMENSION]

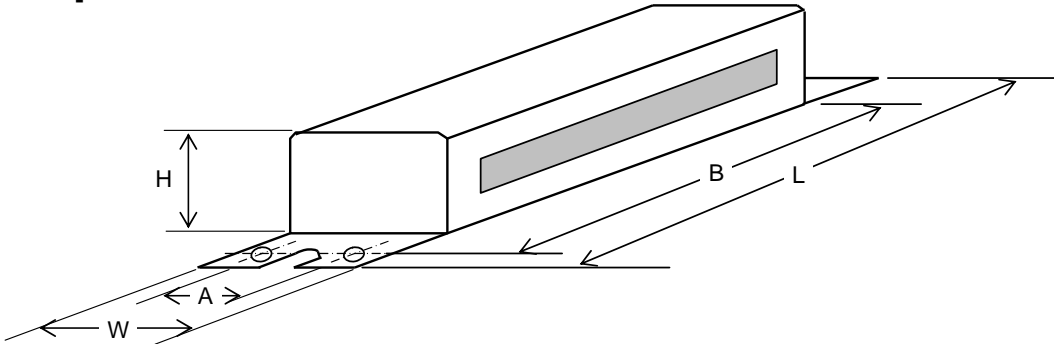

Physical Parameters : inch / cm

L	W	H	B	A
9.448/24.00	1.688/4.287	1.187/3.015	8.858/22.50	1.220/3.10

[WIRING DIAGRAM]

