

PRODUCT FOCUS

120V
SELF-DRIVEN LED LIGHTBAR

SELF-DRIVEN LIGHTBAR

Light Emitting Diode

FOR >> SPORTS BOOK/GAMING
COVE LIGHTING
ACCENT & INDIRECT LIGHTING
FREEZER/COLD CASE
WALL WASHING



MAX10230-05

9 LEDs per 6"



MLSDLB96 2700K
MLSDLB96 5000K

12 LEDs per Foot



MLSDLB12 2700K
MLSDLB12 5000K
MLSDLB12LED 2700K
MLSDLB12LED 5000K

18 LEDs per Foot



MLSDLB18 2700K
MLSDLB18 5000K
MLSDLB18LED 2700K
MLSDLB18LED 5000K

33 LEDs per Foot



MLSDLB33 2700K
MLSDLB33 5000K
MLSDLB33LED 2700K
MLSDLB33LED 5000K


- 120VAC – plugs right into existing power
- Self-driven built-in driver – no additional installation for driver
- Snap-together for uninterrupted long runs – no dead spots
- Fully Dimmable – with any incandescent dimmer



PRODUCT FOCUS

SELF-DRIVEN LIGHTBAR

Light Emitting Diode

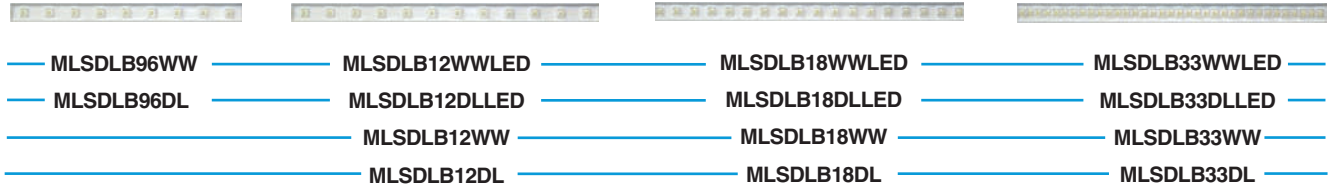


SELF-DRIVEN LIGHTBAR SPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	Strips Bar Length	Aluminum Extrusion	K
1.5	70701	MLSDLB12WWLED Self-driven LightBar 12 LEDs	75	50,000	12"	0.78" w x 0.82" h	2700
1.5	70703	MLSDLB12DLLED Self-driven LightBar 12 LEDs	75	50,000	12"	0.78" w x 0.82" h	5000
2.4	70698	MLSDLB18WWLED Self-driven LightBar 18 LEDs	110	50,000	12"	0.78" w x 0.82" h	2700
2.4	70700	MLSDLB18DLLED Self-driven LightBar 18 LEDs	110	50,000	12"	0.78" w x 0.82" h	5000
3.3	70695	MLSDLB33WWLED Self-driven LightBar 33 LEDs	180	50,000	12"	0.78" w x 0.82" h	2700
3.3	70697	MLSDLB33DLLED Self-driven LightBar 33 LEDs	180	50,000	12"	0.78" w x 0.82" h	5000

SELF-DRIVEN LIGHTBAR SPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	Strips Bar Length	Aluminum Extrusion	K
1.5	11343	MLSDLB9WW Self-driven LightBar 12 LEDs	36	50,000	6"	0.78" w x 0.82" h	2700
1.5	11345	MLSDLB9DL Self-driven LightBar 12 LEDs	36	50,000	6"	0.78" w x 0.82" h	5000
1.5	11343	MLSDLB12WW Self-driven LightBar 12 LEDs	48	50,000	12"	0.78" w x 0.82" h	2700
1.5	11345	MLSDLB12DL Self-driven LightBar 12 LEDs	48	50,000	12"	0.78" w x 0.82" h	5000
2.4	11346	MLSDLB18WW Self-driven LightBar 18 LEDs	72	50,000	12"	0.78" w x 0.82" h	2700
2.4	11348	MLSDLB18DL Self-driven LightBar 18 LEDs	72	50,000	12"	0.78" w x 0.82" h	5000
3.3	11349	MLSDLB33WW Self-driven LightBar 33 LEDs	144	50,000	12"	0.78" w x 0.82" h	2700
3.3	11351	MLSDLB33DL Self-driven LightBar 33 LEDs	144	50,000	12"	0.78" w x 0.82" h	5000

All specifications are subject to change without notice

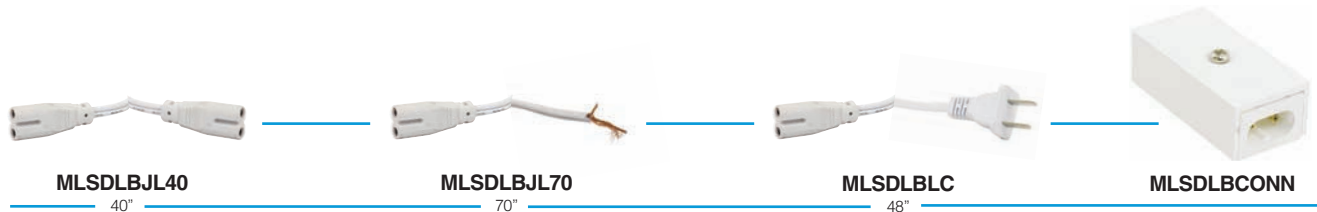

SELF-DRIVEN LIGHTBAR ACCESSORIES

Order Code	Description	Length
70107	MLSDLBJL40 Joiner Lead 40" w/ 2 plugs	40"
70109	MLSDLBJL70 Joiner Lead w/ 1 plug Hard Wire	70"
70251	MLSDLBLC Line Cord 48" w/ Molded Plug to demonstrate Light Bars	48"
70588	MLSDLBCONN LightBar Connection Box	N/A

MAX10230-05



FCC Certified
*UPC Codes

Green Electrical Supply - 877-652-9640 - GreenElectricalSupply.com



PRODUCT FOCUS

SELF-DRIVEN LIGHTBAR

Light Emitting Diode

SPECIAL NOTES	APPLICATIONS	LOCATIONS
<ul style="list-style-type: none"> > 5 year warranty > Super Long Life - 50,000 Hours > No drivers required > No dark spots in run 	<ul style="list-style-type: none"> • Sports Book & Gaming • Mood, Accent & Indirect Lighting • Freezer/Cold Case • Wall Washing 	<ul style="list-style-type: none"> • Sports Book & Gaming • Hospitality/Casino • Commercial Office • Residential

BENEFITS	SPECIFICATIONS
<ul style="list-style-type: none"> • Self-driven built-in driver > No additional installation for driver. • Snap-together > Sections snap together with a simple plastic connector. Make a run by snapping the one-foot sections together for any length desired. • Dimmable > Light levels are dimmable from 100% to 0%. • Super Long Life - 50,000 Hours • 5 Year Warranty 	<ul style="list-style-type: none"> • Input Line Voltage >> 120VAC • Input Line Frequency >> 60HZ • Mini. Starting Temp. >> -30°C • Max. Operating Temp. >> 85°C • Color Rendering Index. >> 70

MAX10230-05

All specifications are subject to change without notice

SELF-DRIVEN LIGHTBAR ACCESSORIES INCLUDED WITH EVERY LIGHTBAR



- 4" Corner joiner for continuous runs



- Bar to Bar Joiner



- Quick clip mounting bracket and screws



- Alternative mounting option double sided tape.