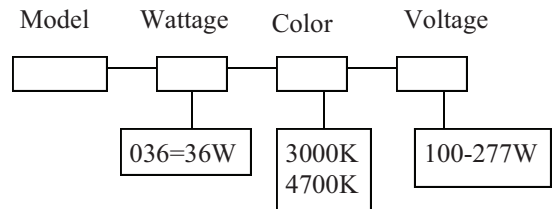
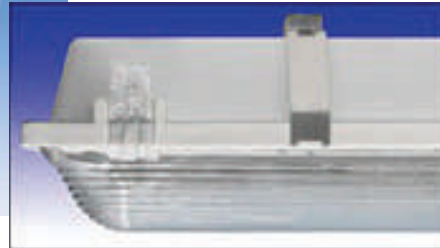


Project Name:

Location:

Date:

Qty:

36W LEDs 4' Two Tube Citadel 2, Clear Diffuser**Electrical Parameters**

Input Voltage: 110-277Vac
 Frequency: 50-60Hz
 Power Supply Efficiency: >87%
 Power: 36W
 PFC: >0.95

Optical Parameters

LED Luminaires Efficiency: >90%
 LED Qty: 554pcs total with 2 lamps
 Lumen (lm): WW 2998Lm +/- 100lm
 Color-Rendering Index: >81Ra
 LED Efficiency: 90lm/w
 Color Temp: WW 3000-4700K

Ratings:

UL, NSF

Install Location:

- Food processing facilities
- Commercial kitchen
- Breweries
- Industrial facilities
- Livestock containment buildings
- Parking Garages
- Under Awnings
- Laundries
- Road Tunnels
- Car Washes

Other Parameters:


Operating Temperature: -20C to 50C
 Humidity: 15-70%
 THD: is less than 0.2
 Size: 30mm x 1200mm or 4'
 Main Material: Aluminum Alloy + PC
 Appearance: Transparent
 IP Rating: IP65
 30% LED Depreciation: 50,000hrs

Housing:

CITADEL 2
 Poured in place Gasket seal
 Economical Mounting System
 Very tough Diffusers resist breakage
 5VA (fl) rated housing materials

Options:

Wide Distribution Reflector - Additional Cost

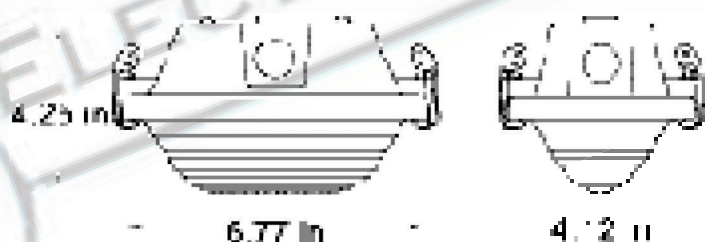

3 Year Labor and Part Warranty against manufacturer defect is provided to use under normal operating conditions. Proof of purchase must be provided when warranty service is requested. Notice that improper use or unauthorized repair will not be covered by the warranty. S3J Electronics reserves the right to make changes to this document and to the product without notice.