



Green Electrical Supply

maximize your green[®]

www.GreenElectricalSupply.com



KTEB-140-1-TP-EMI-WS


ELECTRONIC CIRCLINE BALLAST



DESCRIPTION

1x FC16T9 | 120V | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years

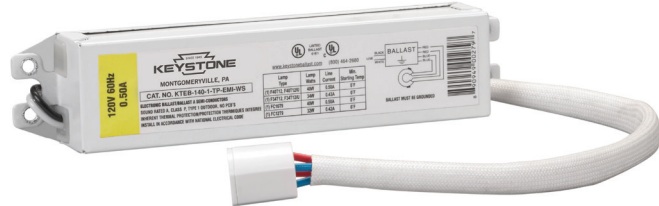


PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected


ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC16T9 (40W)	1	120V	37.5W	0.53A	0.58	1.41	0.95	2.53	150%
FC12T9 (32W)	1	120V	29.0W	0.42A	0.57	1.40	0.92	3.17	150%

WIRING DIAGRAM

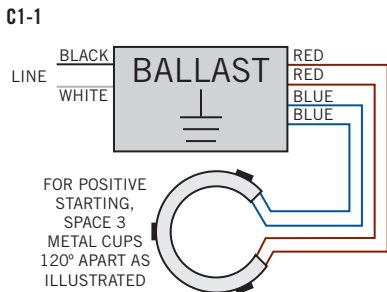

HOT SPOT LOCATION

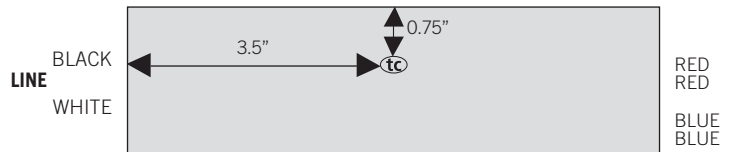




KTEB-140-1-TP-EMI-WS

ELECTRONIC CIRCLINE BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	6.46"
WIDTH	1.32"
HEIGHT	1.00"
MOUNTING	6.00"
CASE STYLE	L7

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACKAGE QUANTITY	ITEM STATUS
KTEB-140-1-TP-EMI-WS-CP	Carton Pack	20	Active

CATALOG NUMBER BREAKDOWN

KTEB-140-1-TP-EMI-WS-CP

