



**Green Electrical Supply**

maximize your green<sup>®</sup>


[www.GreenElectricalSupply.com](http://www.GreenElectricalSupply.com)



**Catalog Number** 73432  
**UPC Number** 60198673432  
**Description** Combo Exit/Emergency  
LED  
RED Letters White Housing  
High Output

#### Features

- ▶ Combination LED Energy Saving Exit Sign and LED Emergency Lighting Unit In One Compact Design
- ▶ Long Life Energy Saving LED Lamps
- ▶ Completely Self-Contained
- ▶ Fully Automatic Operation
- ▶ Push to Test Switch
- ▶ Automatic Low Voltage Disconnect (LVD)
- ▶ 120 or 277 VAC Operation
- ▶ Charge Rate/Power On LED Indicator Light
- ▶ Energy Consumption of Less than 4 Watts for Red letters and Less than 2 Watts for Green Letters
- ▶ Injection-Molded, UL 94 V-O Flame Retardant,
- ▶ High Impact, Thermoplastic Housing
- ▶ Fully Adjustable Glare-Free LED Lamps
- ▶ Heads Rotate 180°+ for Maximum Field Flexibility
- ▶ Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
- ▶ Field replaceable chevron directional indicators
- ▶ Integral wiring channels to facilitate installation
- ▶ 3.6 Volt 1000/1800 mAh Sealed Ni-Cad Rechargeable Maintenance-Free Battery
- ▶ 90 Minute Minimum Battery run Time
- ▶ Input Current: .22A 120V .10A 277V
- ▶ Input Wattage: 1.8W Standard; 2.5W Remote Capable
- ▶ Environmentally-Coated, Solid State Charger
- ▶ Damp Location Rated
- ▶ UL 924 Listed
- ▶ 5 Year Warranty

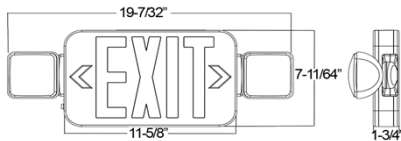

#### Dimension Information

L Inches	19-7/32"
H Inches	7-11/64"
Depth Inches (mm)	1-3/4"

#### Specifications

Input Rating Amps:	.22A@120V .10A@277V
Input Rating Watts:	1.8W
Frequency:	60 Hz
Voltage Rating:	120/277
Flammability Rating:	UL94V-0

#### Packaging

Box Qty	1
Master Carton Qty	6

#### Certifications

UL	UL 924
cUL	No
RoHS	Yes

