



Green Electrical Supply

maximize your green[®]


www.GreenElectricalSupply.com



Catalog Number 73435
UPC Number 60198673435
Description Combo Exit/Emergency LED
Green Letters Black Housing
High Output

Features

- Long Life Energy Saving LED Lamps
- Completely Self-Contained
- Fully Automatic Operation
- Push to Test Switch
- Automatic Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 2 Watts for Green letters
- Injection-Molded, UL 94 V-O Flame Retardant, High Impact, Thermoplastic Housing
- Fully Adjustable Glare-Free LED Lamps
- Heads Rotate 180°+ for Maximum Field Flexibility
- Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
- Field replaceable chevron directional indicators
- Integral wiring channels to facilitate installation
- 3.6-Volt Sealed Ni-Cad Rechargeable Maintenance-Free Battery
- Environmentally-Coated, Solid State Charger
- Input Current: .22A 120V .10A 277V
- Input Wattage: 1.8W Standard; 2.5W Remote Capable
- Remote Capability for up to 2 Additional Standard Remote Lighting Fixtures
- 2 heads - 4 hours operation
- 3 heads - 2 hours operation
- 4 heads - 1.5 hours operation
- CAUTION: Use Only LED Remote Lamp Heads with Remote Capable Units
- Damp Location Rated
- UL 924 Listed
- 5 Year Warranty

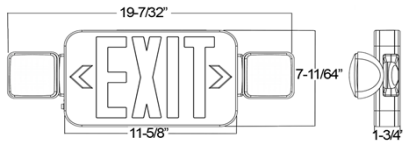

Dimension Information

L Inches	19-7/32"
H Inches	7-11/64"
Depth Inches (mm)	1-3/4"

Specifications

Input Rating Amps:	.22A@120V .10A@277V
Input Rating Watts:	2.5W
Frequency:	60 Hz
Voltage Rating:	120/277
Flammability Rating:	UL94V-0

Packaging

Box Qty	1
Master Carton Qty	6

Certifications

UL	UL 924
cUL	No
RoHS	Yes

