



Green Electrical Supply

maximize your green[®]

www.GreenElectricalSupply.com



D10CC150UVT-F

1050mA LED Driver

- Universal Input Voltage 120 – 277 Vac
- 0-10V Dimming w/ Programmable Tuning
- Thermal Foldback Control



Performance	
Input Voltage	120 ~ 277 Vac
Input Current Max	1.40 /120V 0.59/277V
Input Power Max	165W /120V 161W/277V
Input Frequency	50 - 60 (Hz)
Power Factor	> 0.95
THD max	< 20 %
Output Voltage	50V-143V
Output Current	105-1050mA
Output Power	150W Max
Line Regulation	±1 %
Load Regulation	±3 %
Output Current Ripple	<10%
Inrush Current	120V: 31A / 210uS
Peak / >50% Duration	277V: 74A / 200uS

- Meets FCC Part 15 (Class A) Non-Consumer Limits
- Inrush current complies with NEMA 410
- * Refer to charts for additional information

Environmental	
EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Minimum Operating Temperature	-40°C (-40°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
tc	85°C (185°F) max
Location Rating	UL Dry & Damp, Type HL
Transient Protection	IEEE C62.41 6kV/6kV

Physical	
Length	9.50 in (241.3 mm)
Width	2.40 in (61.0 mm)
Height	1.55 in (39.4 mm)
Mounting Length	8.89 in (225.8 mm)
Weight (lbs)	2.6
Lead Lengths	
Blk, Wht, Blk/Wht, Blu/Wht	8 in
Red(+), Blue(-), Gry, Prp	8 in

Lead-wires are 18 AWG 105°C /600V solid copper.

Protection

Over voltage, Overload and short circuit, over temp.

Safety:


UL 8750 & CSA 250.13-12

Ordering Information

Order Number	Description	Qty/Carton
D10CC150UVT-F06KC	Standard Product	10

*Consult Factory for Tuning ordering information

Wiring Diagram:

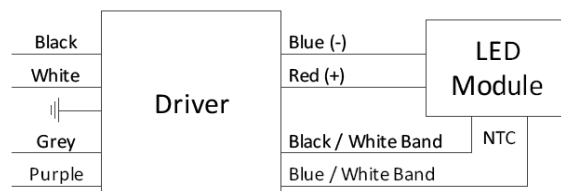

EVERLINE™



D10CC150UVT-F

Programmable Tuned Output Settings

- This Everline LED Driver can be configured to set its current output to a selected fraction of their maximum rated design level. This function is called tuning (or also high-end trim) and it can be implemented with the LDTC01A using the Selector rotary switches. Tuning assignments are stored in driver memory and are not lost when power is removed. All factory produced drivers are tuned to maximum output unless otherwise noted on the label.
- Tuning SET Levels are listed in the table to the right. The SET Level corresponds to an associated Output Current value.
- Tuned output tolerance of $\pm 5\%$.
- Refer to application note EVD06 at www.unvlt.com for additional information.

Set Value	Output Current (A)
100	1.050
99	1.035
98	1.020
97	1.005
96	0.990
95	0.975
94	0.960
93	0.946
92	0.931
91	0.917
90	0.903
89	0.888
88	0.874
87	0.860
86	0.847
85	0.833
84	0.819
83	0.806
82	0.792
81	0.779

Set Value	Output Current (A)
80	0.766
79	0.753
78	0.740
77	0.727
76	0.714
75	0.702
74	0.689
73	0.677
72	0.665
71	0.653
70	0.641
69	0.629
68	0.617
67	0.605
66	0.593
65	0.582
64	0.571
63	0.559
62	0.548
61	0.537

Set Value	Output Current (A)
60	0.526
59	0.516
58	0.505
57	0.494
56	0.484
55	0.473
54	0.463
53	0.453
52	0.443
51	0.433
50	0.424
49	0.414
48	0.404
47	0.395
46	0.386
45	0.377
44	0.367
43	0.359
42	0.350
41	0.341
40	0.332




Application and operation performance specification information subject to change without notification.



D10CC150UVT-F

0-10V Dimming

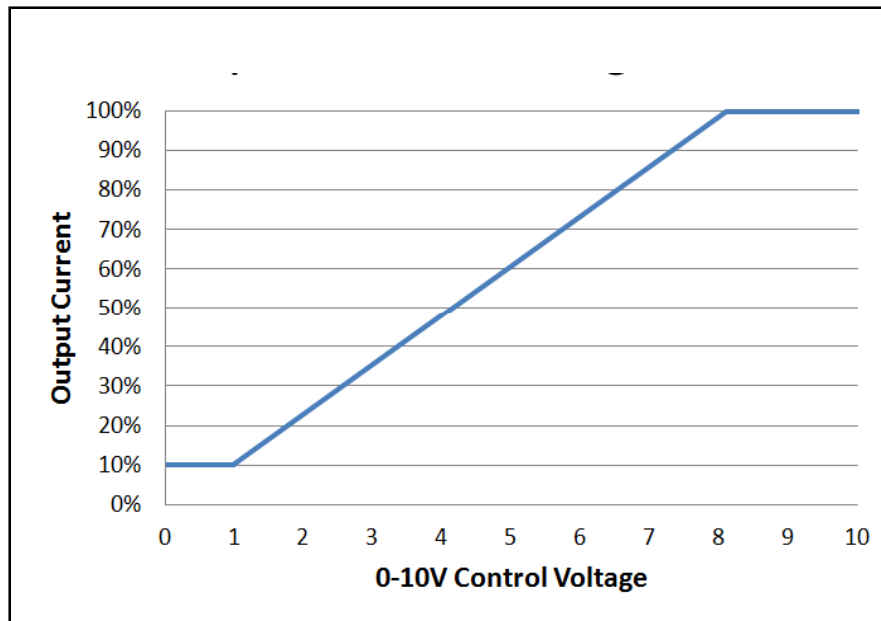

0-10V Analog Dimming Interface

- Analog 0 to 10 vDC Voltage Control
- Use Violet (+) & Gray (-) for connection to 0-10vDC.
- 10v = maximum output, 0v = minimum output
- Wiring Violet & Gray together provides min. light output.
- Capping Violet & Gray separately provides 100% light output.
- 0-10V interface can be wired as Class 1 or Class 2 Circuit.
- Driver will source a maximum of 200uA for control needs.
- Controller must sink current from the 0-10V control leads.

EVERLINE™




Application and operation performance specification information subject to change without notification.



D10CC150UVT-F

Performance: Efficiency, THD, & Power Factor

Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

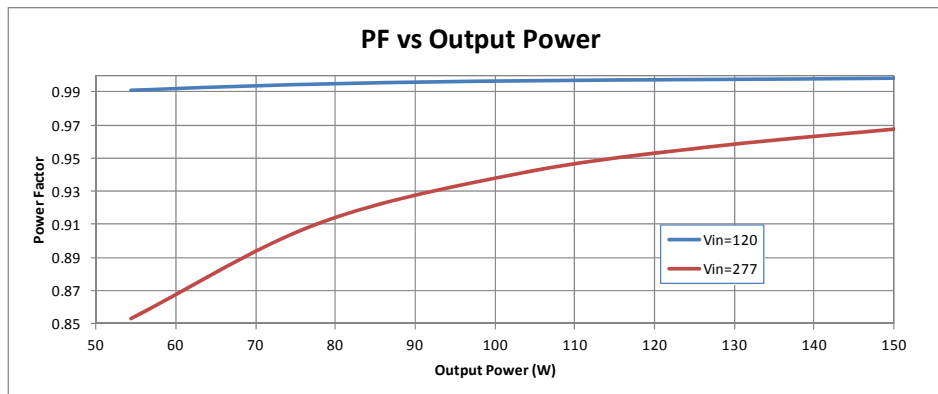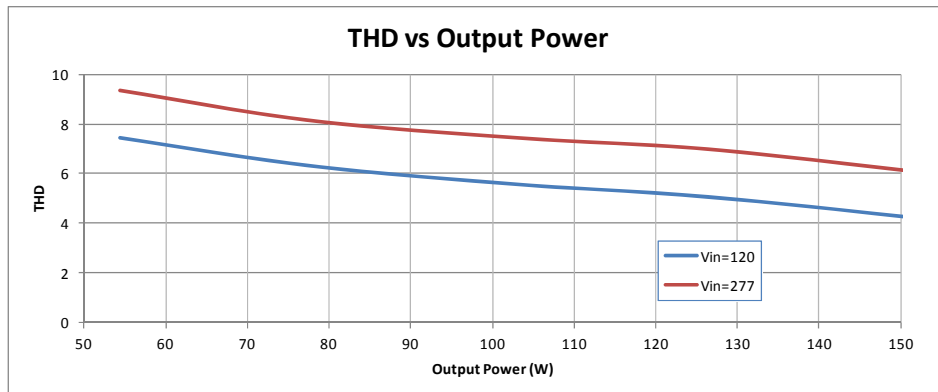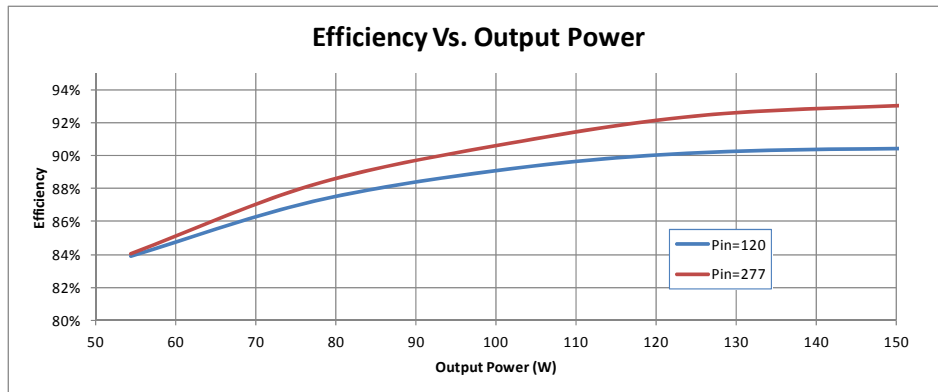

Output power based on maximum rated output current and varying load voltages.



Application and operation performance specification information subject to change without notification.




Module Thermal Foldback Protection

Thermal Foldback Control

Luminaire temperature monitoring/protection
LED Driver reduces output current for external thermal protection if an NTC (Negative Thermal Coefficient) is connected to the Black/White and Blue/White leads.
Connect unused Black/White and Blue/White leads together when thermal foldback control is not used.

- See application note on www.unvlt.com for more information.

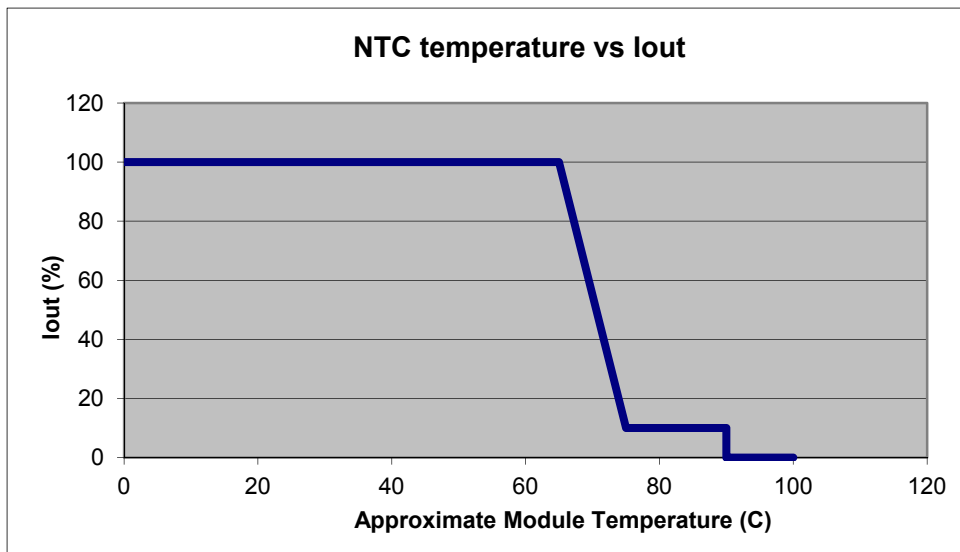

(Example with the Murata NTC p/n NCP18XV103J03RB)




Application and operation performance specification information subject to change without notification.




D10CC150UVT-F

Life vs. Driver Tcase

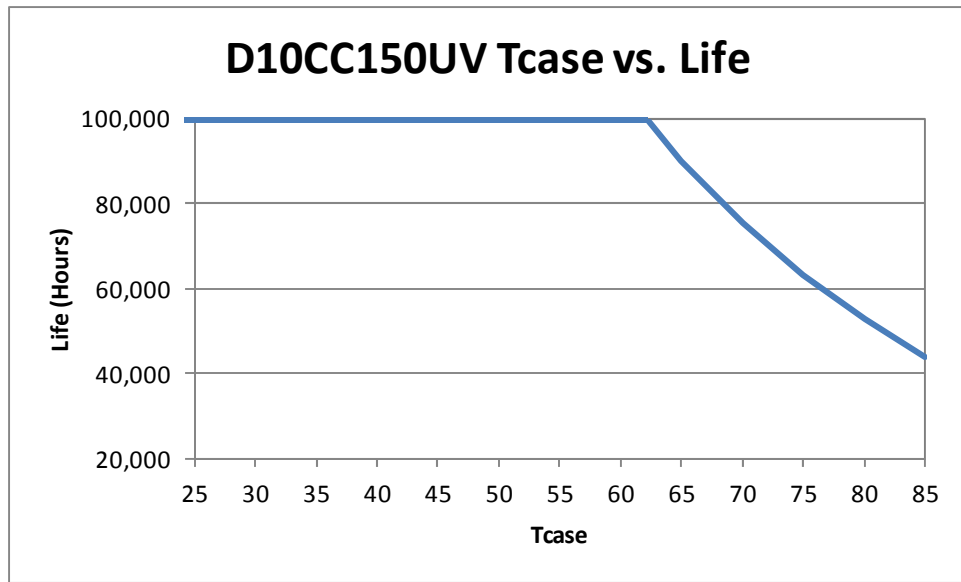

The Data curve provided predicts the LED Driver life based on the case temperature measured at the Tc location identified on the label or specification sheet. The Telecordia SR-332 standard is used to generate the prediction curves.

Dimensional Diagram

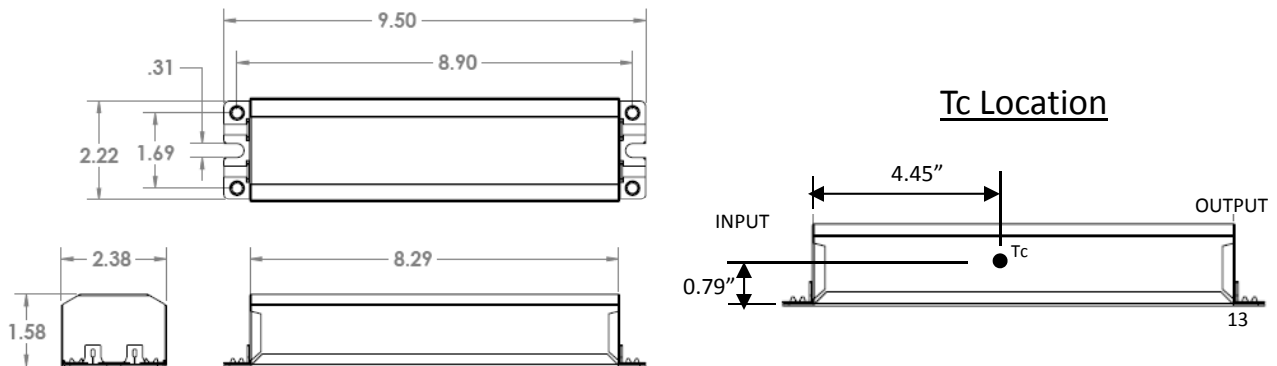

Application and operation performance specification information subject to change without notification.



D10CC150UVT-F

Conditions of Acceptability –

1. The drivers shall be installed in compliance with the applicable requirements of the end-product standard for, mounting, spacing, casualty and segregation
2. The Drivers are suitable for use in “DRY” or “DAMP” locations.
3. The maximum available parameters from the isolated dimming connection leads were within the maximum allowable limits for Class 2, inherently limited as specified in the UL 1310 standard for Class 2 Power Units, and CAN/CSA C22.2 No. 223 standard for Power Supplies with Extra-Low Voltage Class 2 Outputs.
4. When the drivers are installed in the end-use application, the maximum measured temperature at the “Tc” location indicated on the Marking Label, see Illustration #1 (Label), shall not exceed the specified temperatures in the following table:

Model	Max Case Temp (°C)		
	tc	Ambient @ Low Input Voltage Rating	Ambient @ High Input Voltage Rating
D10CC150UVT-F	85°C	51°C	61°C

5. The Leakage Current measurements were not performed on this unit. Compliance with leakage current requirements shall be determined in the end-product standard.” And, leakage current available from “User Accessible” dimming circuit shall be considered.
6. The leads for the connection of the primary (Black-White), the output (Red-Blue), the dimming circuit, and the Temperature sense circuit are R/C (AVLV2/8), 18 AWG, 600 V minimum, 90°C. The suitability of the leads shall be determined in the end-use application.
7. The thickness of the sheet steel used for the housing of the drivers is 0.51 mm. However, the housing was subjected to the “MECHANICAL STRENGTH FOR METAL ENCLOSURES TEST” specified in section 8.13 of UL8750 standard and the results of the test were in compliance.
8. These drivers may be provided with an optional temperature sense circuit (Black/White and Blue/White Leads). These leads are intended for connection to LED Array modules provided with temperature sensing circuits for the purpose of dimming the output to levels in accordance to the detected excessive temperature.

The temperature sense circuit is considered to be an extension of the secondary circuit and suitability and the reliability of the function of the temperature sense circuit shall be determined in the end-use application.

Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.



Application and operation performance specification information subject to change without notification.