



Green Electrical Supply

maximize your green[®]

www.GreenElectricalSupply.com



CC1322MTP

T8 ELECTROMAGNETIC BALLAST



DESCRIPTION

1 x 13W CFL | 120 Input Voltage | Normal Power Factor | Preheat Start

STARTING METHOD: Preheat
LAMP CONNECTION: Series
INPUT VOLTAGE: 120VAC + 5% -10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years


PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F14T8	1	120	16	0.33	0.40	1.70	0.80	5.00	15
F15T8	1	120	16	0.27	0.49	1.67	0.71	4.44	15
F18T8	1	120	16	0.25	0.51	1.56	0.71	4.44	15
F14T12	1	120	16	0.33	0.40	1.70	0.80	5.00	15
F15T12	1	120	16	0.30	0.46	0.56	0.85	5.31	15
F20T12	1	120	16	0.25	0.58	1.65	0.65	5.31	15
CFT13W/GX23	1	120	16	0.26	0.50	1.67	0.93	5.81	15
FC6T9 20W	1	120	17.5	0.24	0.60	1.56	0.73	4.17	15
FC8T9 22W	1	120	18	0.30	0.51	1.59	0.73	4.06	15

WIRING DIAGRAM

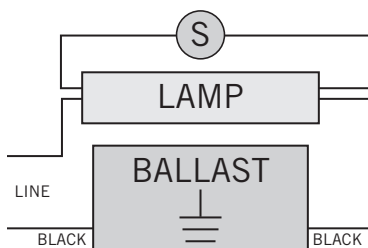




CC1322MTP

T8 ELECTROMAGNETIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	3.15"
WIDTH	1.14"
HEIGHT	1.77"
MOUNTING	2.50"
CASE STYLE	B2

STANDARD LEAD LENGTHS*

BLACK	1 x 9", 1 x 18"
-------	-----------------

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
CC1322MTP-CP	Carton Pack	TBD	Active

CATALOG NUMBER BREAKDOWN

CC1322MTP-CP

C	C	1	3	2	M	T	P	-	C	P
Core and Coil	Min. Wattage	Max. Wattage	Magnetic	Thermally Protected	Core	Thermally Protected	Core	Thermally Protected	Core	Thermally Protected