



**Green Electrical Supply<sup>®</sup>**

**maximize your green<sup>®</sup>**

[GreenElectricalSupply.com](http://GreenElectricalSupply.com)



## Features

- 2-in-1 tube: regular T8 tube with backup battery
- Built-in lithium batteries
- Easy battery shutoff switch for a long stocking time
- Anti-electric shock safety switches - patented
- Easy to install and cost-effective
- 5-year warranty

## Specifications

<b>Color Temperature</b>	3000K, 3500K, 4000K, 5000K
<b>Wattage</b>	8W (2ft), 15W (4ft)
<b>Length</b>	2ft, 4ft
<b>CRI</b>	>80
<b>Input Voltage</b>	AC120-277V
<b>Light Output</b>	960lm (2ft), 1890lm (4ft)
<b>LED Type</b>	SMD2835
<b>Power Factor</b>	>0.92
<b>Luminous Efficiency</b>	>120lm/W
<b>Battery Backup Time</b>	90 minutes
<b>Light Output When on Battery</b>	420 lm at 3.5W
<b>Rated Hours</b>	50,000 hours
<b>Warranty</b>	5-year


## Product Compliance & Certifications:

- ETL
- DLC
- 90 minutes battery time per industry standard

## Description

Aleddra's G3 Emergency LED T8 Tube is a 2-in-1 tube that can be used as a regular T8 lamp and automatically draws power from its built-in battery and lasts more than 90 minutes on battery at 420lm. It is double-end wired on line voltage (ballast bypass). It comes with dual safety switches on both end caps, which had been documented by a federal agency to be the most effective means of electric shock protection for an LED T8 tube. It is a cost-effective option for many facilities such as office buildings, schools, hotels, multifamily apartments, hallways, corridors, and stairs. It is required to operate on an always-on circuit in order to keep the battery charged at all time.

## Wiring Diagram

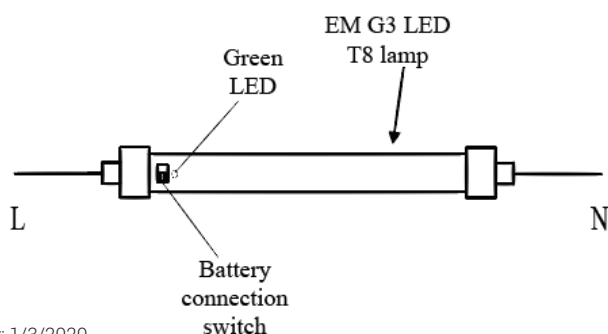

## Ordering Information

Product Model #	Wattage	Color	length
LLT-2-EM-T8-G3-8W-40K	8W	4000K	2ft
LLT-2-EM-T8-G3-8W-50K	8W	5000K	2ft
LLT-4-EM-T8-G3-15W-30K	15W	3000K	4ft
LLT-4-EM-T8-G3-15W-35K	15W	3500K	4ft
LLT-4-EM-T8-G3-15W-40K	15W	4000K	4ft
LLT-4-EM-T8-G3-15W-50K	15W	5000K	4ft