

Specification Sheet



Catalog Number: MH-70X-D-FCAN

70W METAL HALIDE

General Information

Lamp Type	70W MH
ANSI Designation	M98
Line Voltage (V)	120/277
Regulation	5%
Frequency (Hz)	60
Recommended Fuse (A)	4/2
Circuit Type	HX-HPF
Insulation Class	180°C
Capacitor Value	8 MF
Capacitor Voltage Rating	280 V
Cap. Temp. Rating	90°C
Winding Materials (Pri/Sec)	Cu/Cu
Lamp Starter	-
Agency Certification	RU, cRU
Maximum Distance to Lamp	10 FT

Wiring Diagram

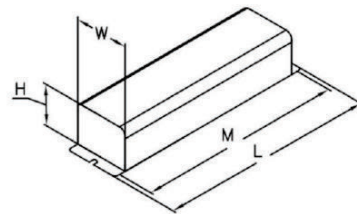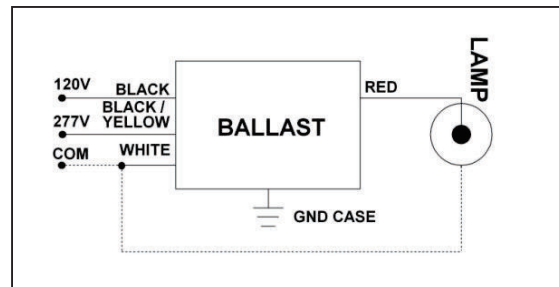

Electrical Characteristics

Line Volt (V)	Power Factor	Line Current (A)			Input Power (W)	Open Circuit Voltage (V)	Min Start Temp.	UL Temp. Code
		Operating	Open	Start				
120	High	0.70	1.69	0.52	82	258	-30°C	A
277	High	0.30	0.75	0.24	79	260	-30°C	A

Physical Characteristics

Overall Dimensions (Inches)				Ballast Net Weight (KG)	Lead Length (Inches)
Length	Width	Height	Mounting		
11.8	3.23	2.75	11.4	4.30	12-14

1.877.652.9640
248.652.9640

Commercial and Residential
Monday-Friday 8am - 5pm EST



Green Electrical Supply

www.GreenElectricalSupply.com

2355 Arizona Court, Rochester Hills, MI 48309