



**Green Electrical Supply<sup>®</sup>**

**maximize your green<sup>®</sup>**

[GreenElectricalSupply.com](http://GreenElectricalSupply.com)

# PRODUCT INFORMATION

## Satco LED T5 mini bi-pin (G5) ballast bypass series


Ballast bypass replacement for mini bi-pin linear fluorescent T5 preheat lamps in existing fixtures.

### Features

- No ballast or external driver required
- Available in 6", 9", 12", & 21"
- Direct wire 120-277V line voltage
- PET Shatterproof coated
- Long life—50,000 hours
- Damp location
- c-UL-us classified
- 5 Year warranty



Double Ended Wiring




### LED T5-Ballast Bypass Lamps




Item Number	Lamp Description	Replaces	W	V	CRI	Base Type	Bm	CCT	Lm	MOL (nom) Length (in)	Life/Hrs.	UPC
S11900	2W/LED/T5/840	F4T5/CW	2	120-277	80	G5	240°	4000	150	5.91 (6)	50K	045923119002
S11901	2W/LED/T5/865	F4T5/D	2	120-277	80	G5	240°	6500	150	5.91 (6)	50K	045923119019
S11902	3W/LED/T5/840	F6T5/CW	3	120-277	80	G5	240°	4000	270	8.91 (9)	50K	045923119026
S11903	3W/LED/T5/865	F6T5/D	3	120-277	80	G5	240°	6500	270	8.91 (9)	50K	045923119033
S11904	4W/LED/T5/830	F8T5/WW	4	120-277	80	G5	240°	3000	400	11.91 (12)	50K	045923119040
S11905	4W/LED/T5/840	F8T5/CW	4	120-277	80	G5	240°	4000	400	11.91 (12)	50K	045923119057
S11906	4W/LED/T5/865	F8T5/D	4	120-277	80	G5	240°	6500	400	11.91 (12)	50K	045923119064
S11907	7W/LED/T5/830	F13T5/WW	7	120-277	80	G5	240°	3000	700	20.91 (21)	50K	045923119071
S11908	7W/LED/T5/840	F13T5/CW	7	120-277	80	G5	240°	4000	700	20.91 (21)	50K	045923119088
S11909	7W/LED/T5/865	F13T5/D	7	120-277	80	G5	240°	6500	700	20.91 (21)	50K	045923119095

# Satco LED T5 mini bi-pin (G5) ballast bypass series


S11900, S11901

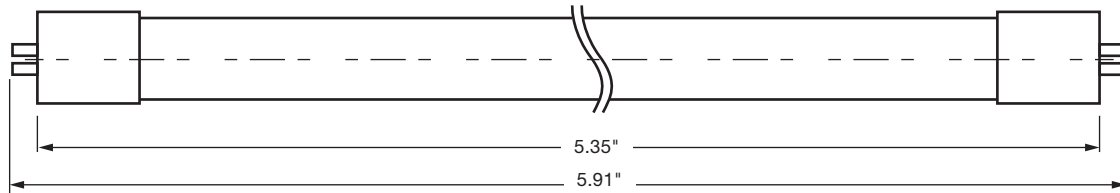

S11902, S11903

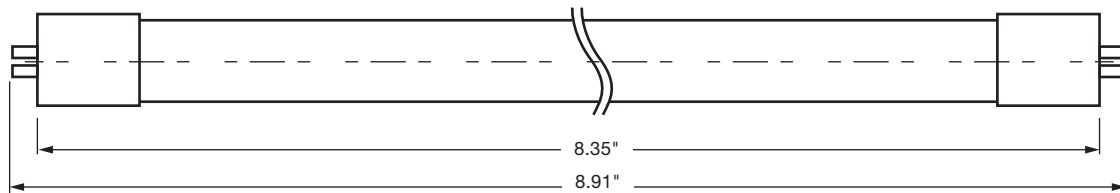

S11904, S11905, S11906

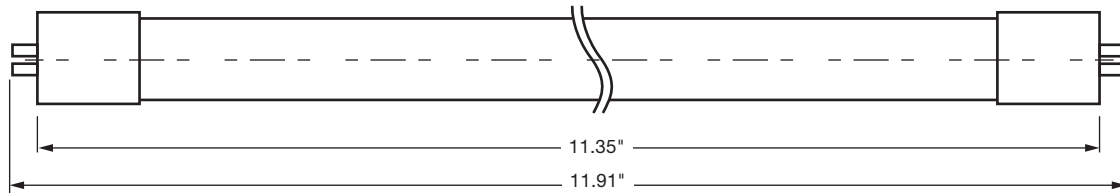

S11907, S11908, S11909

